


Crack Moving Detector

SAVE THE WORKFORCE OF MAINTENANCE

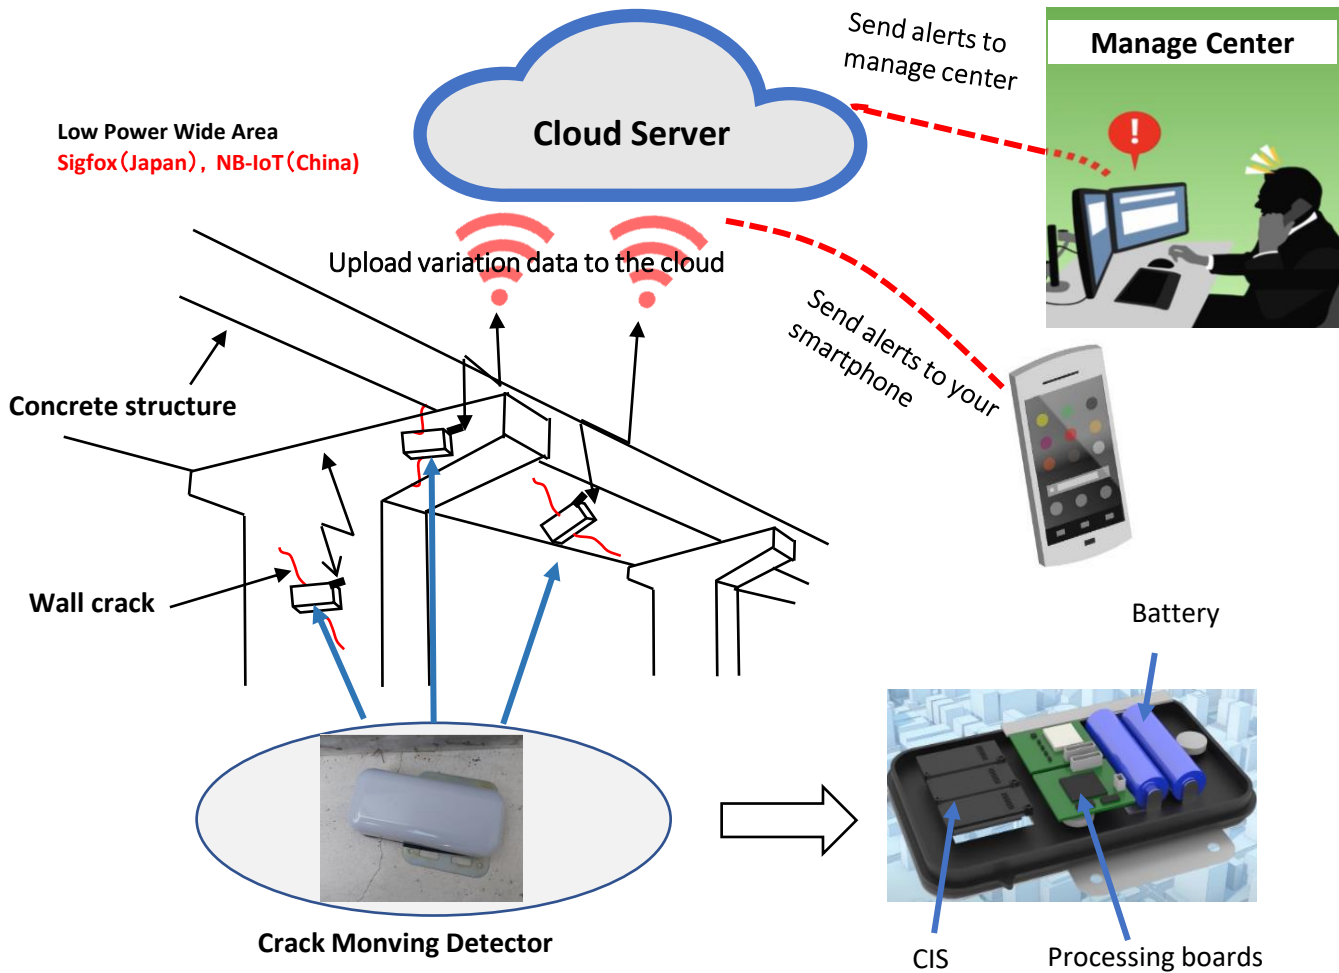

CIS
Contact Image Sensor
Outputs crack data as images

Features

- Output exact image without distortion by using Contact Image Sensor
- Detect cracks with 0.021mm (1200DPI)
- Reduce the burden of manage center by only transferring variation data
- Automatically and continuously monitor transitions at the same position of cracks
- Compact size (LxWxH:176x80x44 mm) and light weight (about 280g)
- Ready to use after installation
- Battery-powered for about 5 years
- Equipped with tempureture and humidity sensor
- Countermeasure against falling with cable
- Detachable
- Reusable with battery replacement